

# CGC

## 40/50/55/60/70

IC-CUSHION      LPG  
8,000 / 10,000 / 12,000 / 13,500 / 15,500 lbs.  
(4000 / 5000 / 5500 / 6000 / 7000 kg)



**CLARK**<sup>®</sup>  
**THE FORKLIFT**





- With four turns lock-to-lock the **hydrostatic power steering** provides the operator with excellent maneuverability and ease of control.

- The spacious operator compartment includes an **easy to read** dash-mounted instrument panel that uses indicator lights to monitor system functions.

- The spacious operator compartment includes an **easy to read** dash-mounted instrument panel that uses indicator lights to monitor system functions.

# 7 metric tons

With a **capacity** of up to **15,500 lbs.** the CLARK CGC 40/50/55/60/70 gets the job done.

- Nested upright rails provide positive rail interlock and a narrow “column” to **maximize the vision window**. The overhead guard safety bars run parallel to the operator’s line of sight resulting in a **clear, unobstructed view**.

**Maximum Visibility + Minimum Fatigue = Ultimate Safety & Product Integrity**



## Highly Maneuverable, Easily Serviceable, Broadly Flexible, Extremely Dependable

The CGC40/70-series proudly adds to CLARK’s unique history of building the best forklifts with evolutionary steps in **ergonomics, power, safety, durability, and performance**. These models, designed for distribution, manufacturing and warehousing of all types, are suited for the toughest applications.



# CGC STANDARD FEATURES & BENEFITS



## BRAKING SYSTEM

### ■ Simple & Error Proof

- Brakes are applied with a hydraulic servo-type power brake valve.
- Transmission disengages when parking brake is set preventing driving against brakes.

## HYDRAULIC SYSTEM

### ■ Maximum Horsepower

- Uses a load-sensing flow control valve for steering to reduce horsepower loss and heat buildup.

### ■ Optimum Performance Of Attachments

- The main hydraulic valve incorporates adjustable flow controls for tilt and auxiliary functions.

### ■ Sectional Design

- Allows for easy addition of extra functions and simplifies service.

### ■ Upright Mounted Load Lowering Valve

- Controlled lowering independent of engine speed.



## STEERING AXLE

### ■ Rugged Design

- Linkage pivot pins have a “double shear” design to withstand impact without loosening or breaking.

### ■ Simple Axle Design

- Double-ended cylinder provides steering force.



## TRANSAXLE

### ■ Integral Axle And Transmission

- No exposed seals or driveshafts to wear or collect debris.

### ■ Modulated Shift Protection

- Smooth Engagement, Cushioned Shifting.

### ■ Common Sump

- Allows both axle and transmission lube to be cooled with the transmission cooling system.

### ■ Heavy Duty

- Torque convertor, clutches and axle gearing extend life and minimizes service requirements.

### ■ Inching Valve

- with Left Brake Pedal operation allows for precisely controlled travel speeds during high speed lifting.



## THE POWER BEHIND THE PUNCH

### ■ Field-Proven 4.3 L V-6 GM LPG Engine

- Built for Smooth & Quiet Operation.
- Hardened exhaust and intake valves provide long life.

### ■ Auto Shut-Down

- Protects your investment in the event of excessive engine coolant temperature, high transmission oil temperature or low engine oil pressure.

### ■ Keeping Uptime To A Maximum

- System can be simply diagnosed using automotive-style malfunction light and fault codes.

### ■ No Tools Required

- In less than 30 seconds you have access to the engine.

### ■ EPA Compliant

- Engines meet reduced emission and smoke levels.



## RUGGED UPRIGHT AND CARRIAGE

### ■ Maximum Visibility

- Nested I-Channel allows space for cylinders, hoses and chains.

### ■ Hydraulic Cushioning Valves

- Silent Staging Reduces Shock & Vibration.

### ■ Shimmable, Sealed & Canted Load Rollers

- Carriage has 6 load rollers.
- Maximize Load Distribution & Reduce Free Play.


## Available Equipment

- Mirrors
- Sideshifters
- Strobe lights
- Backup alarm
- Auxiliary valves
- Rear work light
- Turn signal lights
- Hose adaptations
- Convenience console
- Combination stop/tail/backup lights
- Operator cab with heater
- Hydraulic control options
- Unitrol foot directional control
- Suspension seat, vinyl and cloth
- Lift Eyes
- Bottler's tilt
- Tire Options
- Louvered Hood
- Travel Speed Limit
- Short turning radius counterweight
- Pre-cleaner
- ° overhead guard mounted
- Air cleaner safety element
- Two-speed Transmission
- U.L. Type LPS construction
- Seat actuated engine shutdown
- Reduced height overhead guard



## ONE-PIECE FRAME

- Heavy duty, welded, and formed steel plate design protects from impact damage and extends the life of the truck.
- Tilt cylinders anchored with heavy frame structure.

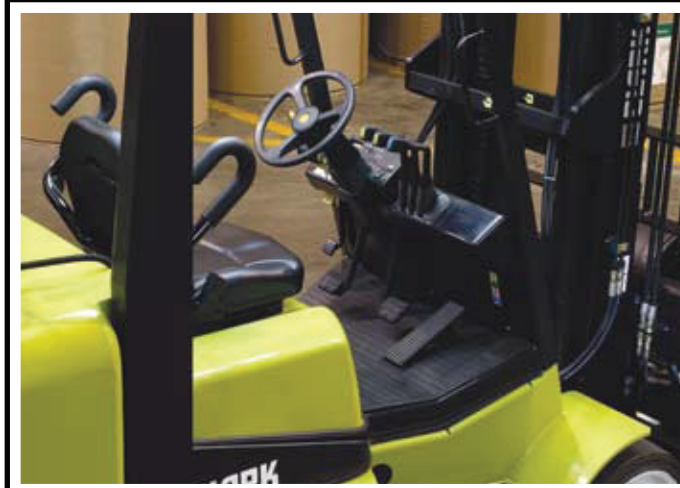

## OPERATOR COMPARTMENT

### ■ Fully Adjustable, Full Suspension Seat

- 2.4" Vertical Travel • 20° Backrest Adjustment Range
- 6" fore / aft adjustment • Contoured for support
- Non-Cinching, Retractable Seat Belt

### ■ Thick Molded Floor Mat

- Reduces vibration and noise level.
- Improves operator comfort.

### ■ Tilt Steering Column

- Adjusts to Suit Operator & Easier Entry/Exit.

### ■ Fingertip Operation

- Electronic directional controls minimize fatigue.

### ■ Largest Operator Compartment in the Industry

# GENERAL DATA & STANDARD DIMENSIONS

# STANDARD SPECIFICATIONS

## Upright Table

Maximum Fork Height in mm	Overall Height Lowered in mm	Free Lift in mm	Standard Tilt Spec B°/F°
<b>CGC40 Standard</b>			
110 2794	83.2 2114	6.5 165	8/9
• 122 3073	89.1 2264	6.5 165	8/9
145 3683	101 2565	6.5 165	5/6
169 4293	112.7 2864	6.5 165	5/6


Maximum Fork Height in mm	Overall Height Lowered in mm	Free Lift in mm	Standard Tilt Spec B°/F°
<b>CGC40 Triple Stage</b>			
170 4328	83 2106	57 1453	5/6
• 188 4778	89 2256	63 1603	5/6
198 5039	98 2481	72 1828	5/3
211 5378	101 2556	75 1903	5/3
229 5829	107 2706	80 2053	5/3
253 6428	118.5 3006	92 2353	3/0

Maximum Fork Height in mm	Overall Height Lowered in mm	Free Lift in mm	Standard Tilt Spec B°/F°
<b>CGC50 Standard</b>			
104 2645	84 2131	6.5 174	8/9
• 116 2945	90 2281	6.5 174	8/9
140 3530	102 2581	6.5 174	8/9
163 4140	113.4 2881	6.5 174	5/6

Maximum Fork Height in mm	Overall Height Lowered in mm	Free Lift in mm	Standard Tilt Spec B°/F°
<b>CGC50 Triple Stage</b>			
162 4115	83.5 2117	49 1258	5/6
• 178 4529	89.5 2267	55 1408	5/6
190 4825	95.5 2417	61 1558	5/3
198 5029	101 2567	67 1708	5/3
220 5578	107 2717	78 1858	5/3
243 6178	119 3017	85 2158	3/0

Maximum Fork Height in mm	Overall Height Lowered in mm	Free Lift in mm	Standard Tilt Spec B°/F°
<b>CGC55 Standard</b>			
100 2540	84 2132	6.9 175	8/9
• 112 2845	90 2281	6.9 175	8/9
135 3430	102 2582	6.9 175	8/9
159 4040	114 2882	6.9 175	5/6

Maximum Fork Height in mm	Overall Height Lowered in mm	Free Lift in mm	Standard Tilt Spec B°/F°
<b>CGC55 Triple Stage</b>			
152 3874	83.5 2117	51 1298	5/6
• 169 4288	89.5 2267	57 1448	5/6
180 4588	95.5 2417	63 1598	5/6
192 4876	99.0 2515	64 1625	5/3
210 5338	107 2717	74 1898	5/3
234 5938	119 3017	86 2198	3/0

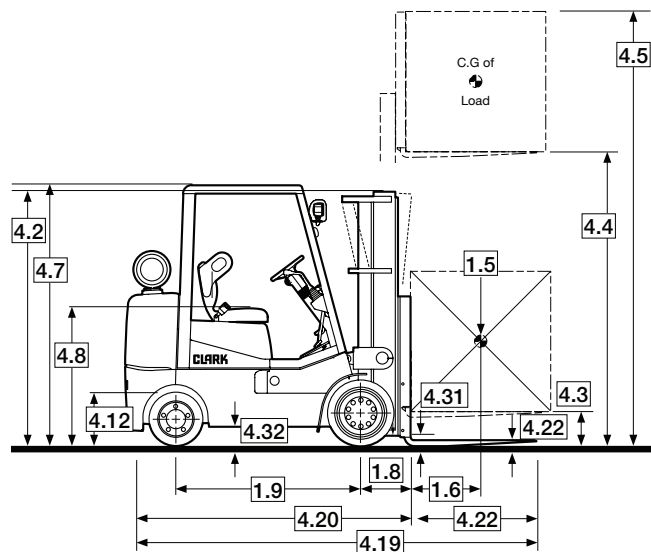

## Upright Table cont.

Maximum Fork Height in mm	Overall Height Lowered in mm	Free Lift in mm	Standard Tilt Spec B°/F°
<b>CGC60/70 Standard</b>			
103 2616	92 2337	8.5 216	8/8
• 117 2972	99 2515	8.5 216	8/8
135 3429	108 2743	8.5 216	8/8
159 4039	120 3048	8.5 216	8/8

Maximum Fork Height in mm	Overall Height Lowered in mm	Free Lift in mm	Standard Tilt Spec B°/F°
<b>CGC60/70 Triple Stage</b>			
150 3810	92 2337	55 1397	5/6
• 174 4420	100 2540	63 1600	5/6
189 4801	105 2667	68 1727	5/6
198 5029	108 2743	72 1829	5/3
222 5639	119 3023	83 2108	5/3
275 6985	142 3607	103 2616	3/0

\* Indicates Common Preferred Spec

## Notes

Production engines and driveline components may vary in output and/or efficiency by ±5%. The performance shown represents nominal values which may be obtained under typical operating conditions of a machine.

## ANSI/ITSDF and Insurance Classification


Standard truck meets all applicable mandatory requirements of Part III-ANSI/ITSDF B56.1 Safety Standard for Powered Industrial Trucks and Underwriters Laboratories requirements as to fire hazard only for D and LP classifications. For further information contact a Clark representative.

Users should be aware of, and adhere to, applicable codes and regulations regarding operator training, use, operation and maintenance of powered industrial trucks, including:

- ANSI/ITSDF B56.1
- NFPA 505, fire safety standard for powered industrial trucks - type designations, areas of use, maintenance and operation.
- Occupational Safety and Health Administration (OSHA) regulations that may apply.

Contact your authorized CLARK forklift truck dealer for further information including operator training programs and auxiliary visual and audible warning systems, fire extinguishers, etc., as available for specific user applications and requirements.

Specifications, equipment, technical data, photos and illustrations are based on information at time of printing and are subject to change without notice. Some products may be shown with optional equipment.

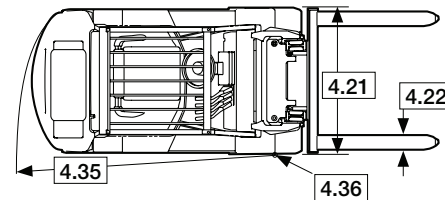


<b>Specifications</b>	1.1	Manufacturer	Clark	Clark	
	1.2	Manufacturer's Designation	CGC 40	CGC 50	
	1.3	Drive unit Diesel, LP. Gas	LPG	LPG	
	1.4	Operator type stand on / driver seated	Rider counterbalanced	Rider counterbalanced	
	1.5	Load capacity / rated load	lbs(kg)	8,000 (4000)	10,000 (5000)
	1.6	Load center distance	in(mm)	24 (600)	24 (600)
	1.8	Load center distance, center of drive axle to fork face	in(mm)	STD 17.3 (439)   TSU 18.1 (460)	STD 17.8 (452)   TSU 18.6 (472)
	1.9	Wheelbase	in(mm)	61.8 (1570)	70.5 (1790)
	<b>Weight</b>	2.1	Service weight	lbs(kg)	12,921 (5861)
2.2		Axle loading, loaded front / rear	lbs(kg)	18,429 / 2,492 (8359 / 1130)	22,431 / 2,421 (10175 / 1098)
2.3		Axle loading, unloaded front / rear	lbs(kg)	5,084 / 7,837 (2306 / 3555)	6,504 / 8,348 (2950 / 3787)
<b>Tires</b>	3.1	Tire type, P = pneumatic, SE = solid pneu, C = cushion	Cushion	Cushion	
	3.2	Tire size, front	in	22 x 9 x 16	22 x 12 x 16
	3.3	Tire size, rear	in	18 x 6 x 12.12	22 x 7 x 16
	3.5	Wheels, number front / rear (x = drive wheels)		2 x / 2	2 x / 2
	3.6	Tread, front	in(mm)	41.8 (1062)	43.8 (1113)
	3.7	Tread, rear	in(mm)	44.0 (1118)	43.0 (1093)
	<b>Dimensions</b>	4.1	Tilt of upright / fork carriage, back / forward, a / b	degrees	STD 8 / 9   TSU 5 / 6
4.2		Height, upright lowered	in(mm)	STD 89.1 (2264)   TSU 89.0 (2260)	STD 90.0 (2286)   TSU 89.5 (2273)
4.3		Freelift	in(mm)	STD 6.5 (165)   TSU 63.0 (1626)	STD 6.5 (165)   TSU 55.0 (1408)
4.4		Lift height	in(mm)	STD 122 (3099)   TSU 188 (4775)	STD 116 (2946)   TSU 178 (4521)
4.5		Height, upright extended	in(mm)	STD 170 (4318)   TSU 236 (5994)	STD 164 (4165)   TSU 226 (5740)
4.7		Height overhead guard	in(mm)	87.2 (2215)	87.2 (2215)
4.8		Seat height	in(mm)	45.25 (1150)	45.25 (1150)
4.12		Coupling height	in(mm)	13.25 (337)	13.25 (337)
4.19		Overall length	in(mm)	138 (3505)	153.2 (3891)
4.20		Length to face of forks	in(mm)	STD 96.0 (2438)   TSU 96.8 (2459)	STD 105.2 (2672)   TSU 106.0 (2692)
4.21		Width	in(mm)	50.8 (1290)	54.8 (1392)
4.22		Fork dimensions	in(mm)	2 x 5 x 42 (50 x 127 x 1067)/III	2 x 6 x 48 (50 x 152 x 1220)/III
4.23		Fork carriage		Hook Type	Hook Type
4.24		Fork carriage width	in(mm)	41 (1041)	49 (1245)
4.31		Ground clearance minimum, loaded	in(mm)	3.8 (96)	3.8 (96)
4.32		Ground clearance center of wheelbase	in(mm)	6.1 (155)	6.1 (155)
4.34	Right Angle Stack (add load length and clearance)	in(mm)	STD 106.7 (2710)   TSU 107.5 (2731)	STD 116.0 (2946)   TSU 116.8 (2967)	
4.35	Outside turning radius	in(mm)	89.4 (2270)	98.2 (2494)	
4.36	Inside turning radius	in(mm)	13.2	12.5	
<b>Performance</b>	5.1	Travel speed loaded / unloaded	mph (kph)	12.2 / 12.5 (19.6 / 20.1)	12.1 / 12.4 (19.5 / 20.0)
	5.2	Lift speed loaded / unloaded	fpm(ms)	STD 101/112 (.51/.57)   TSU 97/108 (.49/.55)	STD 89/111 (.45/.56)   TSU 90/105 (.45/.53)
	5.3	Lowering speed loaded / unloaded	fpm(ms)	STD 78.1/72.8 (.40/.37)   TSU 83/80 (.42/.41)	STD 78/92 (.39/.47)   TSU 80/80 (.41/.41)
	5.6	Max. drawbar pull loaded / unloaded	lbs(N)	5,250 / 2,380 (23350 / 10580)	5,000 / 3,125 (22240 / 13900)
	5.8	Max. gradeability loaded / unloaded	%	27.1 (15.4)	20.1 (18.0)
	5.10	Service brake		Power assist disc	Power assist disc
<b>Drive Line</b>	7.1	Manufacturer / Type	GM / Vortec 4300LT	GM / Vortec 4300LT	
	7.2	Rated output per SAE J1349	HP/kW @ rpm	93 / 69 @ 2400	93 / 69 @ 2400
	7.3	Rated speed	rpm	2,650	2,650
	7.4	No. of cylinders / displacement	cu. in.-Liters	6 / 262 - 4.3	6 / 262 - 4.3
8.2	Operating pressure for attachments	psi/bar	Adjustable	Adjustable	
8.4	Sound level, driver's ear	dB(A)	81	81	

For corresponding data see Specification Chart



# GENESIS CGC40/50/55/60/70

Clark CGC 55 LPG Rider counterbalanced 12,000 (5500) 24 (600) STD 18.4 (467)   TSU 19.2 (488) 70.5 (1790) 16,881 (7657) 25,942 / 2,939 (11767 / 1333) 6,720 / 10,161 (3048 / 4609)	Clark CGC 60 LPG Rider counterbalanced 13,500 (6000) 24 (600) STD 18.9 (480)   TSU 19.7 (500) 75.0 (1905) 18,809 (8532) 28,922 / 3,387 (13119 / 1536) 7,804 / 11,005 (3540 / 4992)	Clark CGC 70 LPG Rider counterbalanced 15,500 (7000) 24 (600) STD 18.9 (480)   TSU 19.7 (500) 75.0 (1905) 20,859 (9462) 32,415 3,944 (14703 / 1789) 8,173 / 12,686 (3707 / 5754)
Cushion 22 x 12 x 16 22 x 7 x 16 2 x / 2 43.8 (1113) 43.0 (1093) STD 8 / 9   TSU 5 / 6 STD 90.0 (2286)   TSU 89.5 (2273) STD 6.9 (175)   TSU 57.0 (1448) STD 112 (2845)   TSU 169 (4293) STD 160 (4064)   TSU 217 (5512) 87.2 (2215) 45.25 (1150) 13.25 (337) 155.9 (3960) STD 107.9 (2741)   TSU 108.7 (2761) 54.8 (1392) 2.25 x 6 x 48 (57 x 152 x 1220)/IV Hook Type 49 (1245) 3.8 (96) 6.1 (155) STD 118.3 (3005)   TSU 119.1 (3025) 99.9 (2537) 12.5 11.7 / 12.2 (18.8 / 19.6) STD 76.1/111 (.39/.56)   TSU 82/103 (.42/.52) STD 77/89 (.39/.45)   TSU 75/78 (.38/.40) 4,750 / 3,205 (21130 / 14255) 18.2 / 16.1 Power assist disc GM / Vortec 4300LT 93 / 69 @ 2400 2,650 6 / 262 - 4.3 Adjustable 81	Cushion 22 x 14 x 16 22 x 8 x 16 2 x / 2 44.8 (1138) 42.0 (1067) STD 8 / 8   TSU 5 / 6 STD 99 (2515)   TSU 100 (2540) STD 8.5 (216)   TSU 63.0 (1600) STD 117 (2972)   TSU 174 (4420) STD 165 (4191)   TSU 222 (5639) 91.0 (2311) 45.25 (1150) 13.25 (337) 160.3 (4072) STD 112.3 (2853)   113.1 (2873) 58.8 (1494) 2.5 x 6 x 48 (65 x 150 x 1220) Hook Type 55 (1397) 3.8 (96) 6.1 (155) STD 124.0 (3149)   TSU 124.8 (3170) 105.1 (2669) 11.7 10.3 / 10.4 (16.5 / 16.5) STD 61/83 (.31/.42)   TSU 62/81 (.31/.41) STD 80/69 (.40/.35)   TSU 75/58 (.38/.30) 9,470 / 4,470 (42120 / 19885) 32.3 / 19.9 Power assist disc GM / Vortec 4300LT 93 / 69 @ 2400 2,650 6 / 262 - 4.3 Adjustable 81	Cushion 22 x 14 x 16 22 x 8 x 16 2 x / 2 44.8 (1138) 42.0 (1067) STD 8 / 8   TSU 5 / 6 STD 99 (2515)   TSU 100 (2540) STD 8.5 (216)   TSU 63.0 (1600) STD 117 (2972)   TSU 174 (4420) STD 165 (4191)   TSU 222 (5639) 91.0 (2311) 45.25 (1150) 13.25 (337) 163.1 (4143) STD 115.1 (2923)   TSU 115.9 (2943) 58.8 (494) 2.5 x 6 x 48 (65 x 150 x 1220) Hook Type 55 (1397) 3.8 (96) 6.1 (155) STD 126.3 (3208)   TSU 127.1 (3228) 107.4 (2728) 11.7 10.2 / 10.4 (16.3 / 16.6) STD 60/83 (.30/.42)   TSU 60/81 (.30/.41) STD 80/69 (.40/.35)   TSU 75/58 (.38/.30) 9,420 / 4,450 (41900 / 19795) 29.9 / 17.7 Power assist disc GM / Vortec 4300LT 93 / 69 @ 2400 2,650 6 / 262 - 4.3 Adjustable 81

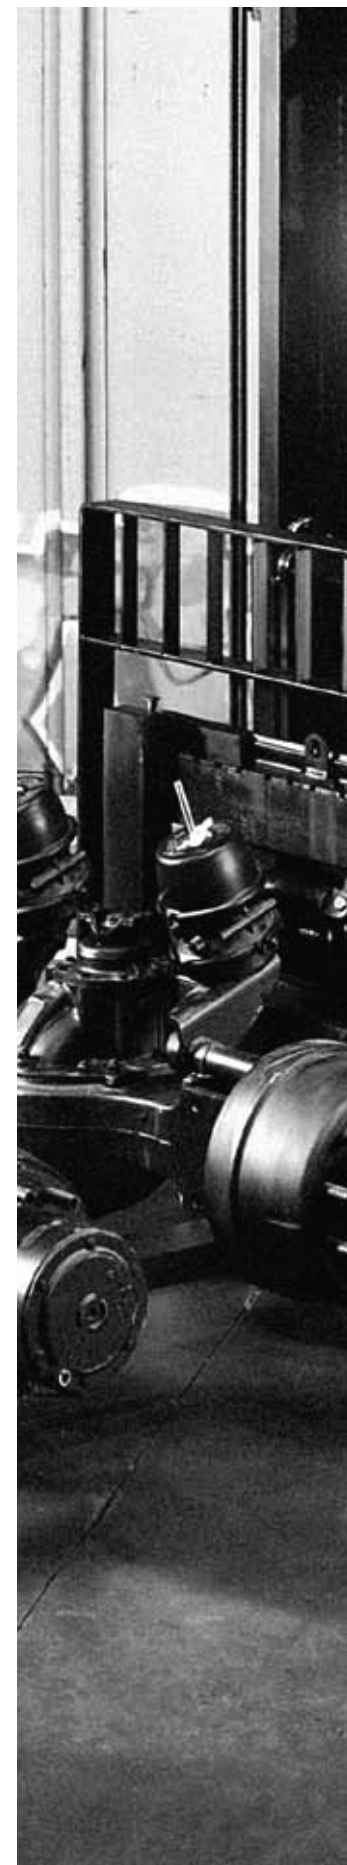

## & Don't Forget... Safety Starts With You!

### Before operating a lift truck, an operator must:

- Be trained and authorized
- Read and understand operator's manual
- Not operate a faulty lift truck
- Not repair a lift truck unless trained and authorized
- Have the overhead guard and load backrest extension in place
- Perform daily inspections

### During operation, a lift truck operator must:

- Wear a seat belt
- Keep entire body inside truck cab
- Never carry passengers or lift people
- Keep truck away from people and obstructions
- Travel with lift mechanism as low as possible and tilted back
- Allow safe stopping distance and come to a complete stop before leaving operator compartment

### To park a lift truck, an operator must:

- Completely lower forks or attachments
- Shift into neutral
- Turn key off
- Set parking brake

- We don't just build forklifts. As a company, we are also focused on providing our customers with the best possible technical service support and aftermarket parts available.
- Even though our business starts with a quality, cost-effective product, our organization understands that it is the support and services we provide after the sale that help keep your business running at peak efficiency.
- **THE CLARK PartsPRO® SYSTEM** is our industry-leading electronic parts and service documentation tool that provides dealers with a quick and accurate method of identifying parts for every CLARK forklift built since 1961. PartsPRO® ensures the availability of the most current technical information and has the unique capability to create parts manuals specific to your mixed CLARK fleet, making it simple to positively identify and order the correct part(s) from your local CLARK dealer. The right CLARK part — The First Time, Every Time.
- **UNRIVALED PARTS SUPPORT** Our Aftermarket Distribution Center provides parts to over 250 North American CLARK dealers and many international dealers. This CLARK operated 184,000 square foot facility is dedicated to supporting the CLARK models built over the last 90 years. This facility is focused on providing excellent off-the-shelf availability, quality parts, quick response time and competitive pricing.

**DEPENDABLE PARTS = DEPENDABLE TRUCKS**

To Find Your Nearest Authorized CLARK Dealer, Visit Our Website [www.clarkmhc.com](http://www.clarkmhc.com)



**BUILT TO LAST.®**



**CLARK MATERIAL HANDLING COMPANY**

North American Headquarters  
700 Enterprise Drive • Lexington, KY 40510  
866-252-5275 • [www.clarkmhc.com](http://www.clarkmhc.com)

**GENESIS CGC40/50/55/60/70**  
59-894-0197 Printed in USA IM04085M

© 2008 CLARK Material Handling Company